



# PoweredUSB-to-IBM SI/O Display Interface

The CyberData PoweredUSB to IBM SI/O display interface allows IBM SI/O displays to be connected to a standard PoweredUSB port. Now, users of IBM pole displays can retain the value of their displays when migrating to an open system solution.




## Features

- Support of IBM RS-485 POS displays
- Existing 4A/B cable support
- Industry standard PoweredUSB connection
- Power is supplied by the PoweredUSB Host
- Epson Pole display emulation
- OPOS drivers
- Available test application and source code
- Unloadable firmware

### PoweredUSB to IBM SI/O Display Interface Specifications

PoweredUSB connection	+12 volt
OS support	Win 2000/XP, WePOS, Linux
Size	3.5" x 1" x 2"
Cable length	1 foot
Warranty	5 years
Part number	010891

## Typical Installation

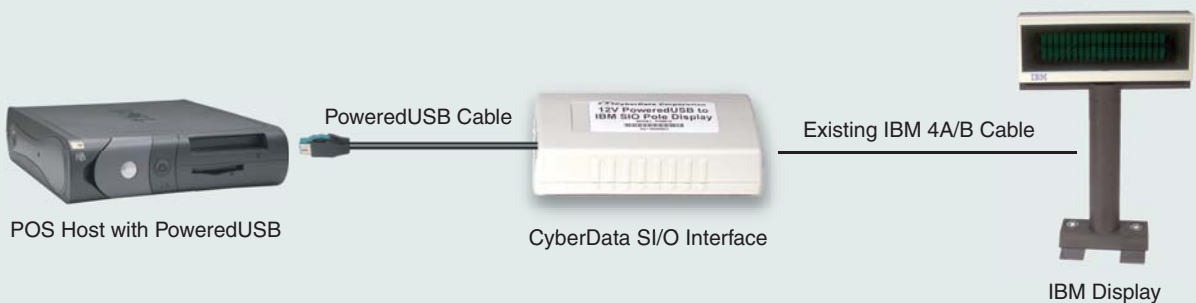



# PoweredUSB-to-IBM SI/O Display Interface