



Singlewire-enabled

# VoIP Ceiling Speaker

The CyberData VoIP Ceiling Speaker is for use with Singlewire's paging and emergency notification software InformaCast® or InformaCast CK.

This PoE-powered device hooks up easily to new and existing Singlewire installations.

## Features

- InformaCast compliant
- InformaCast CK compliant
- Web-based configuration
- Web-based firmware upgradeable
- Plenum-rated enclosure
- Small footprint
- High efficiency speaker driver
- PoE 802.3af-enabled (Powered-over-Ethernet)
- Network and external speaker volume control
- Can drive one external analog speaker for greater coverage




## VoIP Ceiling Speaker Shown with Clock Kit




VoIP Ceiling Speaker Specifications	
Sensitivity	96dB / 1W / 1M S.P. Level
Output	10 Watts Peak Power
Operating Temperature	-30 to 55 C (-22 to 131 F)
Ethernet I/F	10/100 Mbps
Protocol	InformaCast
Power Input	PoE 802.3af
Payload Types	G711, A-law and $\mu$ -law
Regulatory Compliance	FCC Class B, UL 60950, CE
Dimensions	9" x 2.4"
Boxed Weight	4.0 lbs
Warranty	2 years limited
Part Number	011102*, Standard Color, RAL 9002, Gray White 011103, Optional Color, RAL 9003, Signal White *This number replaces the 011065 Speaker number.



# VoIP Ceiling Speaker

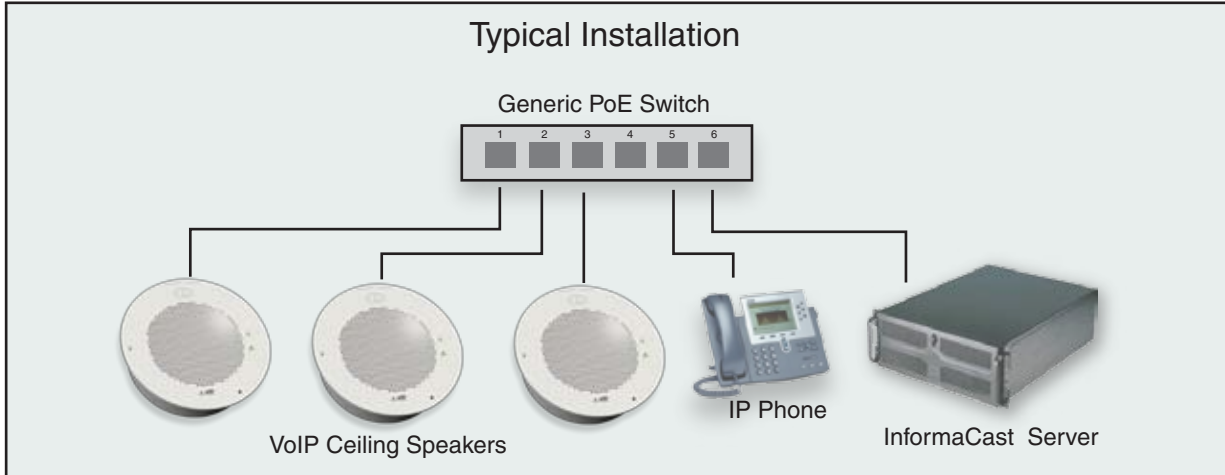

## VoIP Speaker with Extra Speaker Connection

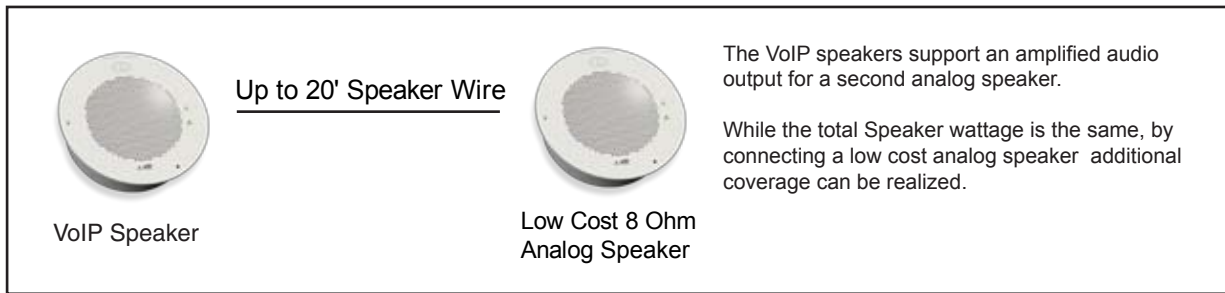

## Mounting

