

# Installation Quick Reference

## VoIP Zone Controller: 4-Port Audio Out *Sip Compliant*

The VoIP Zone Controller is a PoE-enabled, single SIP-endpoint enabling user defined paging zones through a line-out connection to legacy analog amplifiers connected to existing legacy analog paging speakers. SIP compliant IP-PBX's can now interface with existing legacy analog paging speaker installations.

### Product Specifications


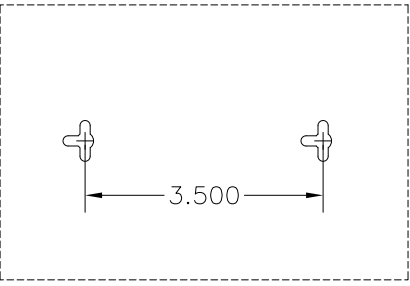


Regulatory Compliance	FCC Class A, UL 60950, CE
Power Requirement	PoE or +48VDC
LAN Speed	10/100 Mbps
Protocol	SiP compliant
Part Number	010881
Dimensions	6.11"L x 4.05"W x 1.15" H
Weight	1.2 lbs.




### Getting Started

- Be sure that you have received all the parts described in the [Parts List](#) section.
- Download the *VoIP Zone Controller - 4-Port Audio Out Operations Guide* at: <http://www.cyberdata.net/support/download.html> or go to [www.cyberdata.net](http://www.cyberdata.net) → Support → FAQs, Drivers, Utilities & Manuals → FAQs, Product Drivers & Documentation

### Parts List

<p><b>(1) VoIP Zone Controller - 4-Port Audio Out</b></p> 	<p><b>(1) Mounting Template (see the last page)</b></p> 
<p><b>(1) Mounting Kit</b></p>	
<p><b>(2) #6 Mounting Anchors</b></p> 	<p><b>(2) #6 x 1 1/2" Screws</b></p> 

## Typical Zone Controller Setup Using the VoIP Zone Controller

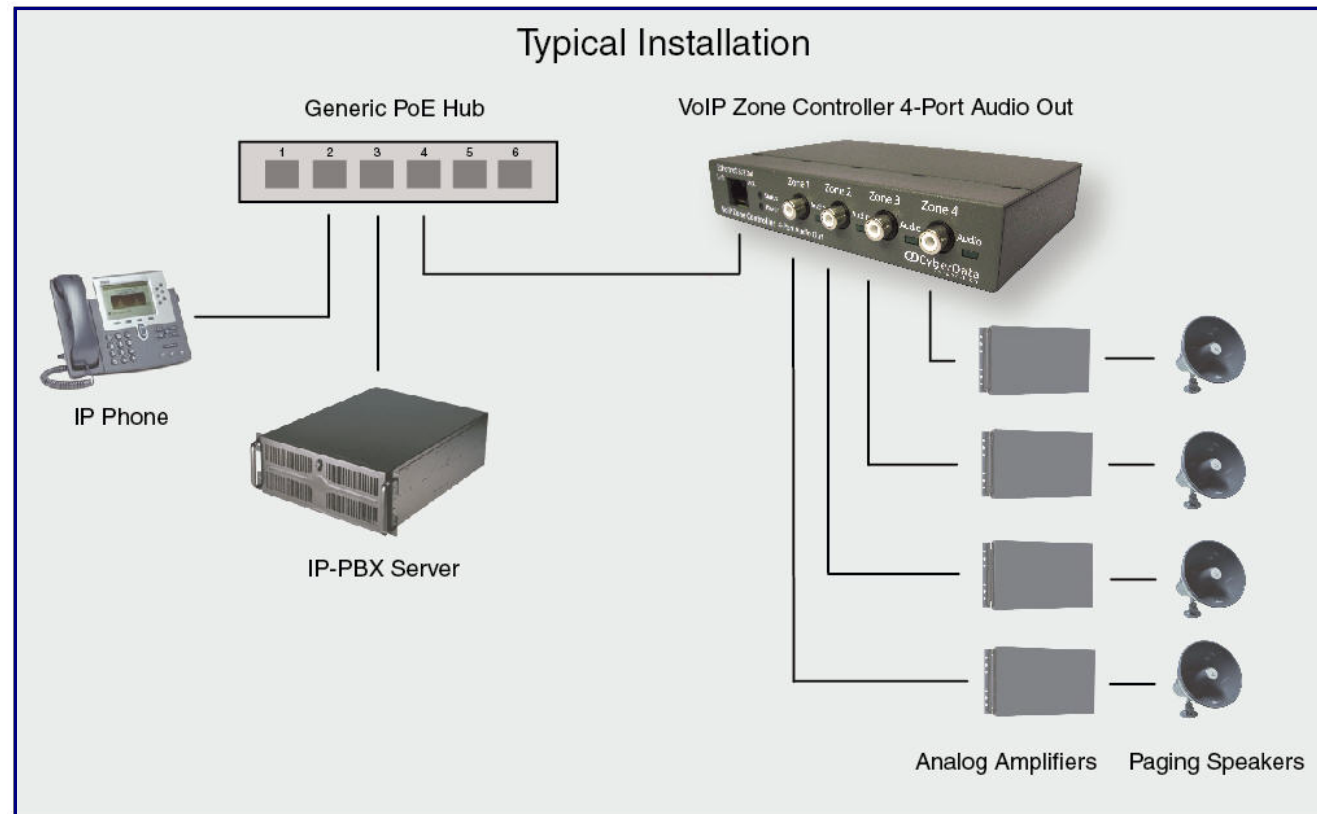

## Mounting (optional) and Setting Up the VoIP Zone Controller: 4-Port Audio Out

**Step 1**

Connect the VoIP Zone Controller to your network. To use PoE, plug one end of an **802.3af** Ethernet cable into the VoIP Zone Controller **Ethernet** port. Plug the other end into your network. Or, use a standard Ethernet cable, and a 48VDC power supply as directed in Step 3.

**Step 2**

You have the option to use the mounting template on the last page of this document to mark, and then drill two 5/32" (0.1875") holes for the mounting anchors. Then, install the mounting anchors in the holes, and position the VoIP Zone Controller mounting holes over the anchors. Use the two #6 sheet metal screws to secure the VoIP Zone Controller onto the mounting surface.

**Step 3**

When not using PoE, also connect the VoIP Zone Controller to a **48VDC power supply**.

If required, connect the earth grounding wire to the chassis ground.

## Verifying Operations and Settings

**Front View with LEDs**

- Green **Link** light indicates network connectivity
- Orange **Link** light indicates 100Mbps baud rate
- Yellow **Link** light indicates 10Mbps baud rate
- Blinking yellow **Act** light indicates network activity
- Blinking blue **Status** light indicates the unit is running
- Green **Paging** light indicates the unit is paging

**Back View with RTFM Switch**

To restore the VoIP Zone Controller's factory default settings, press and hold the **RTFM** turn back on, and then release the switch. All VoIP Zone Controller settings are restored to the factory defaults, and the unit reboots.

## Contacting CyberData

<p><b>Corporate Headquarters</b></p> <p>CyberData Corporation 2555 Garden Road Monterey, CA 93940, USA</p> <p>Phone: 831-373-2601 Fax: 831-373-4193 www.CyberData.net</p> <p>Sales: (831) 373-2601 ext. 334</p> <p>Support: 831-373-2601 ext. 333 Email: support@CyberData.net</p> <p>RMA Dept: (831) 373-2601 ext. 136 Email: RMA@CyberData.net</p>	<p><b>Warranty</b></p> <p>CyberData warrants its product against defects in material and workmanship for a period of two years from the date of purchase. Should the product fail within the warranty period, CyberData will repair or replace the product free of charge. This warranty includes all parts and labor. Should the product fail out-of-warranty, a flat rate repair charge of one half the purchase price will be assessed. Repair costs for products that are in warranty, but damaged by improper modifications or abuse, are charged at the out-of-warranty rate. Products returned to CyberData, both in and out-of-warranty, are shipped to CyberData at the customer's expense. Charges for shipping repaired products to the customer are paid by CyberData.</p> <p>For product service, contact the Returned Materials Authorization (RMA) department. A product will not be accepted for return without an approved RMA number. Send the product, in its original package, to: CyberData Corporation, 2555 Garden Road, Monterey, CA 93940, Attention: RMA "your RMA number"</p>
--	--